

# GLEDHILL



# SNOWPLOWS

**“Tapered” Moldboard Models**




**Tapered Plow with 1WT Table, QCP Loop and Trip Edge shown**

Gledhill Tapered Moldboard Snow Plows are available in the ‘TB’ Series where the “Built-In Baffle” is an integral part of the Moldboard.

These tapered moldboards are designed for the modern, high speed method of plowing at more frequent intervals. The tapered moldboard comes standard with the model 1WT one-way tube table and RH manual reversible table. PCL power circle latch, PR2 power reversible and PRT power reversible tube table assemblies are also available. Cutting edge lengths of 10’, 11’ or 12’ with three (3) different intake and discharge heights are offered.

The ‘TB’ moldboard is a further continuation of the standard curvature design allowing the snow to move farther to the right and stabilizing before leaving the influence of the moldboard curve. This unitized design helps reduce vibration.

All Gledhill ‘TB’ models are ruggedly constructed of high quality steel that is paneled for additional strength. Also standard is our automatic safety trip device that utilizes open extension springs which allows the blade to tilt forward when the plow encounters a solid obstruction. This prevents damage to streets, plow, truck and driver.

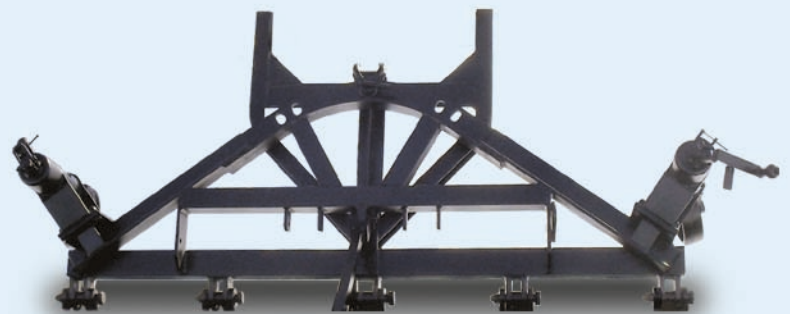

**RH Table with 30” Push shown**

Reversing Table  
with cylinders  
also available.  
Please consult  
factory.

# SPECIFICATIONS

## “Tapered” Moldboard Plows

### Tapered One-Way Plows (1WT)

FLOW MODEL	FLOW LENGTH	OVERALL LENGTH	INTAKE HEIGHT	DISCHARGE HEIGHT	TRIP SPRINGS	CUTTING SWATH @ 35°	WEIGHT APPROX.
10TB1WT	10'	11'	27-1/2"	46-3/4"	3	8'2-1/4"	1543#
11TB1WT	11'	12'	27-1/2"	49"	4	9'0"	1641#
12TB1WT	12'	13'	27-1/2"	51"	4	9'9"	1747#
10HTB1WT	10'	12'	30-1/2"	50-1/2"	3	8'2-1/4"	1661#
11HTB1WT	11'	13'	30-1/2"	52-1/2"	4	9'0"	1744#
12HTB1WT	12'	14'	30-1/2"	54-3/4"	5	9'9"	1882#
10EHTB1WT	10'	12'	38"	58"	4	8'2-1/4"	1741#
11EHTB1WT	11'	13'	38"	60"	5	9'0"	1830#
12EHTB1WT	12'	14'	38"	62"	5	9'9"	1980#

All plows come standard with #10 Ga. Moldboard, One-way Tube Table, Open Extension Trip Springs, Heavy Duty Cast Shoe Assemblies, Built-in Baffle, 1/2" x 6" Cutting Edge, Lift Chain, and Plow Markers. Standard Paint is Black on the Back; Blue, Yellow, Orange or Red on the Front.

### Tapered Manual Reversible Plows (RH)

FLOW MODEL	FLOW LENGTH	OVERALL LENGTH	INTAKE HEIGHT	DISCHARGE HEIGHT	TRIP SPRINGS	CUTTING SWATH @ 35°	WEIGHT APPROX.
10TBRH	10'	11'	27-1/2"	46-3/4"	3	8'2-1/4"	1700#
11TBRH	11'	12'	27-1/2"	49"	4	9'0"	1800#
10HTBRH	10'	12'	30-1/2"	50-1/2"	3	8'2-1/4"	1820#
11HTBRH	11'	13'	30-1/2"	52-1/2"	4	9'0"	1900#

All plows come standard with #10 Ga. Moldboard, 3 position Table, A-Frame, Open Extension Trip Springs, Mushroom Shoe Assemblies, Built-in Baffle, 1/2" x 6" Cutting Edge, Lift Chain, and Plow Markers. Standard Paint is Black on the Back; Blue, Yellow, Orange or Red on the Front.

#### Plow Hook-Up Options

QCP Loop  
Husting Style  
Others Available

#### Moldboard Options

Heavier #7 Gauge Steel  
Extra Vertical Ribs  
Landslide Plate & Nose Shoe  
Trip Cutting Edge  
Special Paint

#### Table Options

PRT Reversing  
PR2 Reversing  
PCL Reversing  
7-Hinge Points  
Level-Lift  
Mechanical Power Float

#### Other Options

Rubber Baffle  
Cushion Valve  
Curb Shoes  
Moldboard Shoes  
Rubber Cutting Edge  
Carbide Cutting Edge

**The Gledhill Road Machinery Co.**

[www.gledhillonline.com](http://www.gledhillonline.com)

P.O. Box 567 • Galion, Ohio 44833

phone: 419-468-4400 • fax: 419-468-6621



Scan the QR code  
with your  
smartphone  
to visit our website.